

PLS Series Plastic Level Switches

The Levelpro PLS Series compact level switches combine low cost and reliability with fast, simple installation. The all plastic level switches contain an hermetically sealed reed switch that is actuated by magnets that are permanently bonded inside the float. They can be easily adapted to open or close a circuit based on the rising or falling of the liquid level. The switch action can be reversed by removing the float, rotating it end-for-end and replacing it on the stem. Vertical models mount internally, oriented within 45° of vertical, or select optional fittings for external mounting. Switch ratings are suitable for many solid-state control systems and small monitors or alarms. Simple relay interfaces can be used for higher current applications such as pumps and on-off valve actuators



Advantages

- Cost Effective
- Easy to Install
- High / Low level Indication
- All Plastic Design
- Excellent Chemical Resistance
- Horizontal / Vertical Operation

Working Principle

As a direct result of rising or falling liquid a magnetic field is moved into the proximity of a reed switch causing its actuation.

Areas of Application


Machines / Tanks / Boilers / Corrosive Liquids / Chemical Skids / Sumps / Solvent Recovery Systems / OEM Applications

TECHNICAL SPECIFICATIONS

Float Material	PP
Wetted Parts Material	PP / PE
Pipe Material	PP
Working Temperature	PP -20 / 80°C
Max. Pressure	15 psi
Min. Density (g/cm ³)	0.7
Electrical Connection	Cable
Number of Float	1 Std.
Number of Contact	1 Std.
Contact Capacity	10W / 200VDC / 110VAC
Description	Liquid Level Relay

Model - PLS-PEV


MODEL	PLS-PE
L	82.0
H	34.0

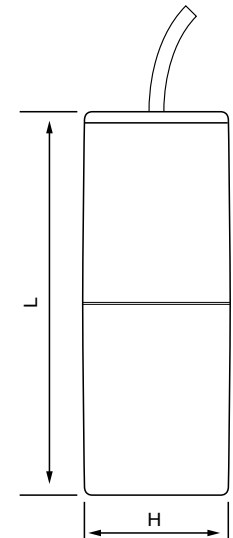

TECHNICAL SPECIFICATIONS

Float Material	PP / PVDF
Wetted Parts Material	PP / PVDF
Pipe Material	PP / PVDF
Float Type	P1 / P8
Working Temperature	PP -20 - 80°C / PVDF -40 -100°C
Mechanical Connection	1/8"
Max. Pressure	Atm.
Min. Density (g/cm ³)	0.7
Electrical Connection	Cable
Number of Floats	1 Std.
Number of Contacts	1 Std.
Contact Capacity	10W / 150VDC / 120VAC
Description	Liquid Level Relay

**Model - PLS-31V (Polypropylene)
PLS-32V (PVDF)**

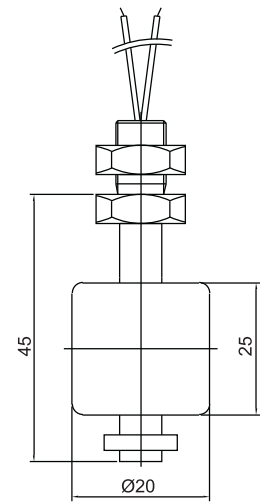


TECHNICAL SPECIFICATIONS

Float Material	PP / PVDF
Wetted Parts Material	PP / PVDF
Pipe Material	PP / PVDF
Float Type	P1 / P8
Working Temperature	PP -20 - 80°C / PVDF -40 -100°C
Mechanical Connection	1/8"
Max. Pressure	Atm.
Min. Density (g/cm ³)	0.7
Electrical Connection	Cable
Number of Floats	1 Std.
Number of Contacts	1 Std.
Contact Capacity	10W / 150VDC / 120VAC
Description	Liquid Level Relay

**Model - PLS31-SV (Polypropylene)
PLS32-SV (PVDF)**



Slosh Shield

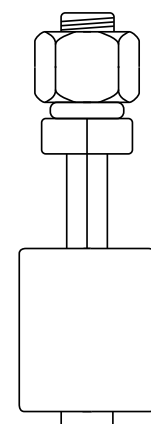

SPECIFICATION	PLS 31 I 41	PLS 33	Model - PLS34H / PLS35H
Float Material	PP	PVDF	
Wetted Parts Material	PP	PVDF	
Float Type	P10	P10	
Working Temperature	-20 / +80°C / -30 / +120°C	-30 / +120°C	
Mechanical Connection	½" NPT / BSP	½" NPT / BSP	
Max. Pressure	60 psi	2	
Min. Density (g/cm3)	0.75	0.85	
Electrical Connection	Cable	Cable	
Number of Floats	1 Std.	1 Std.	
Number of Contacts	1 Std.	1 Std.	
Contact Capacity	10W / 200VDC / 140VAC	10W / 200VDC / 140VAC	
Description	Liquid Level Relay	Liquid Level Relay	

TECHNICAL SPECIFICATIONS		Model - PLS36H
Float Material	PP	
Wetted Parts Material	PP	
Float Type	P10	
Working Temperature	-20 / +80°C	
Mechanical Connection	1" NPT / BSP	
Max. Pressure	60 psi	
Min. Density (g/cm3)	0.75	
Electrical Connection	DIN43650C Socket	
Number of Floats	1 Std.	
Number of Contacts	1 Std.	
Contact Capacity	10W / 200VDC / 110VAC	
Description	Liquid Level Relay	

TECHNICAL SPECIFICATIONS		Model - PLS-B12H
Float Material	PP	
Wetted Parts Material	PP	
Pipe Material	PP	
Float Type	P81	
Working Temperature	-20 / +80°C	
Mechanical Connection	¾" NPT / BSP	
Max. Pressure	150 psi	
Min. Density (g/cm3)	0.75	
Electrical Connection	DIN43650C Socket	
Number of Floats	1 Std.	
Number of Contacts	1 Std.	
Contact Capacity	50W / 200VDC / 110VAC	
Description	Liquid Level Relay	

*Float Diameter is greater than ¾" NPT Dimension