


Submersible Level Sensor
PVC | PP | PVDF | 316 SS


- All Plastic NEMA 4X Enclosure
- 2" Threaded Polyethylene Connection
- Lightweight GRP / High Impact Glass Reinforced Polycarbonate
- Excellent Chemical Resistance
- Weather Resistant






Pig Tail Cable Grip **
for Turbulent Applications

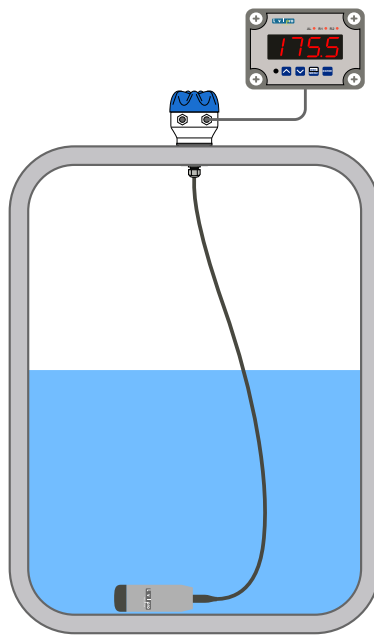

Connect Sensor
to Display

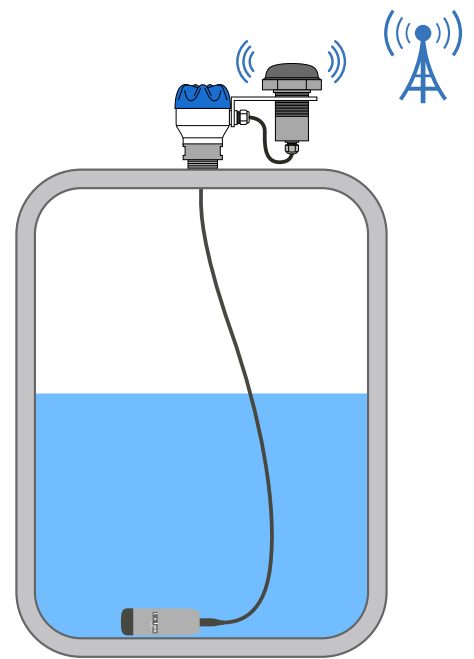

Mounting Bracket For
Sentinel LT
Telemetry Device

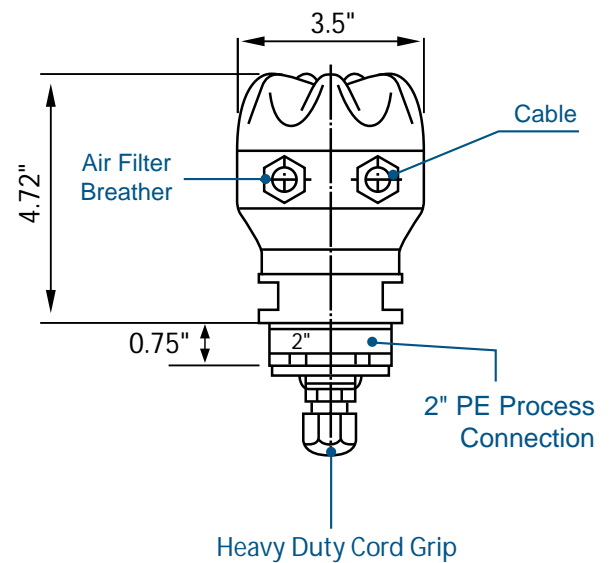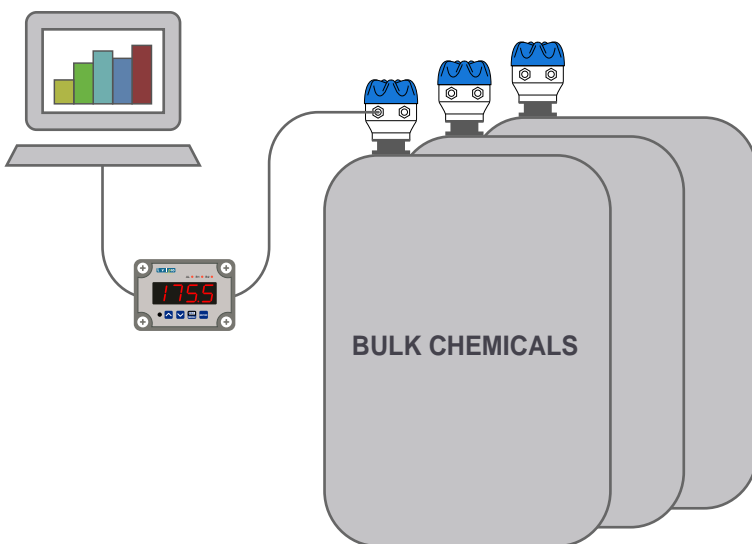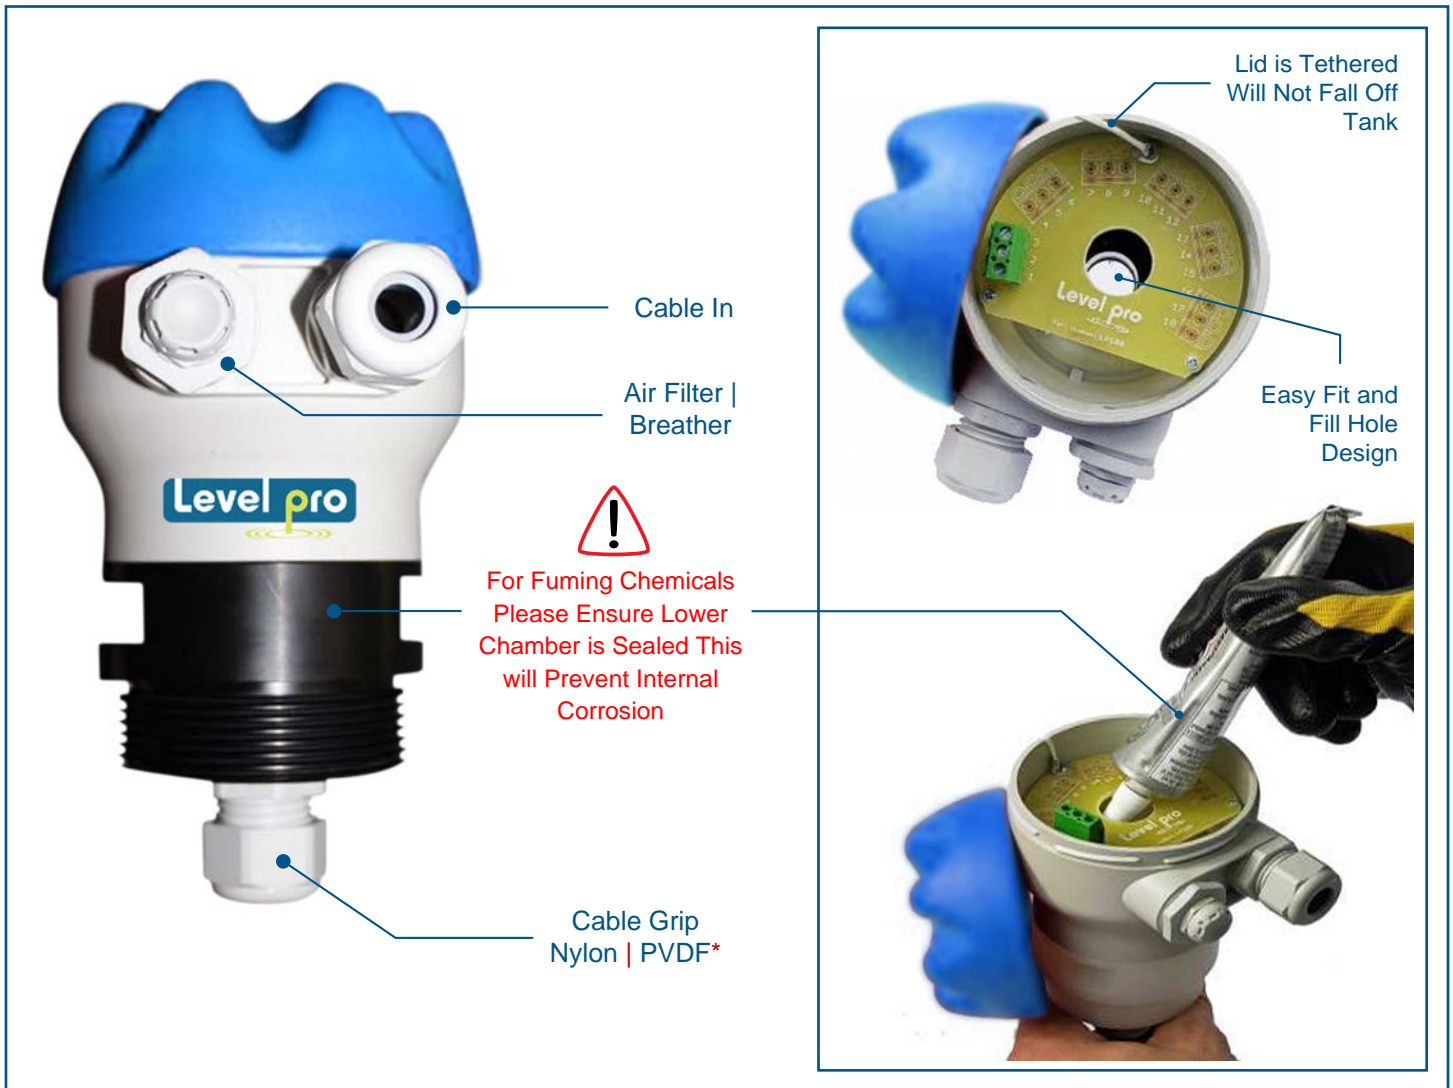

* PVDF is Recommended for Chemicals that Produce Vapor or Out-Gas
 ** Recommended for Turbulent Applications

Warning: For Fuming Chemicals Please Ensure Lower Chamber is Sealed This will Prevent Internal Corrosion - ex RTV Silicone. Please ensure Chemical Compatibility