




- ❑ Teflon® Superior Corrosion Resistance
- ❑ Customizable Lengths | Ranges
- ❑ Phenomenal Accuracy |  $\pm 0.5\%$  F.S

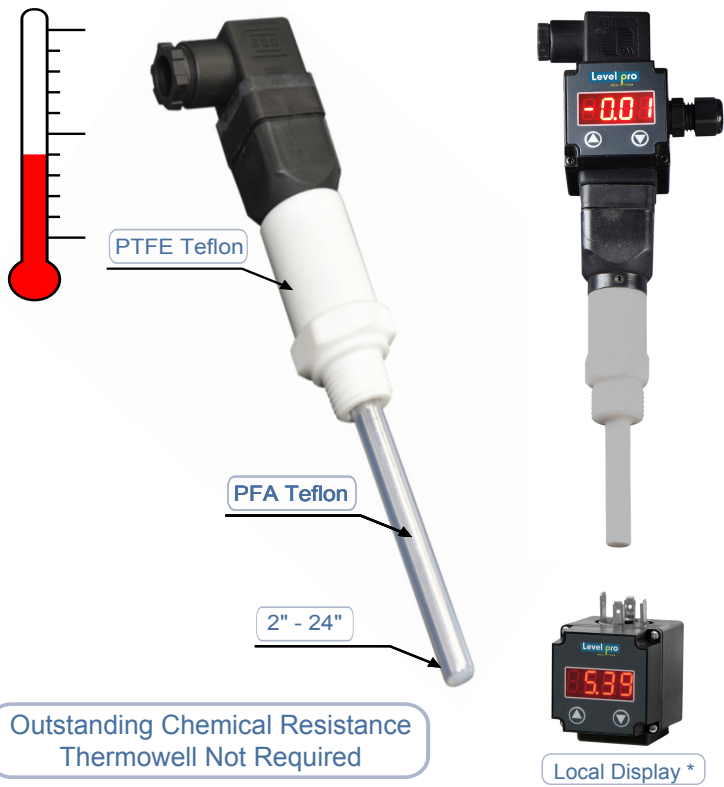

### Dimensions

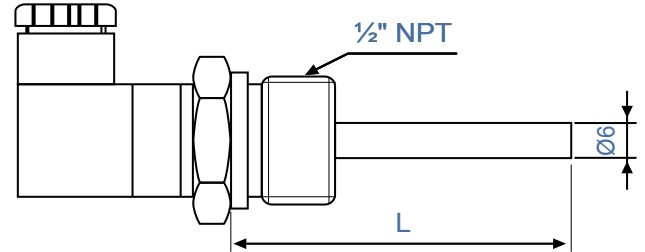

### Wiring Schematic

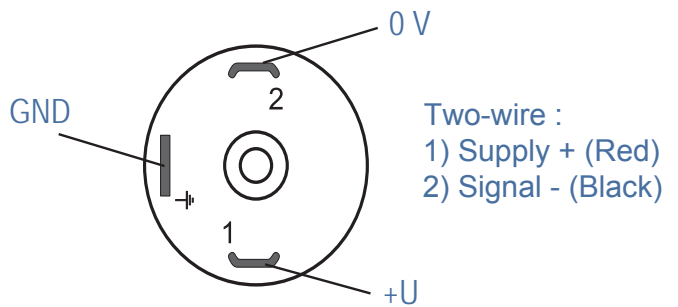


### Specifications

Operating Voltage	9-30VDC
Current Consumption	3VA Max
Output DC Current	150mA   30VDC Max
Output Method	4-20mA Loop Powered
Connection Size	1/2" MNPT Connection
Operating Temp.	-22 - 392°F   -30 - 200°C
Wetted Materials	PFA Teflon® Sensor

### Features

- ❑ Large Temperature Range Capabilities
- ❑ Hirschmann DIN Connector | Termination at Sensor
- ❑ Suitable for Sticky Liquids
- ❑ 2-Wire 4-20mA Loop Powered
- ❑ Local LED Display Option
- ❑ No Calibration Required

### Application Diagram

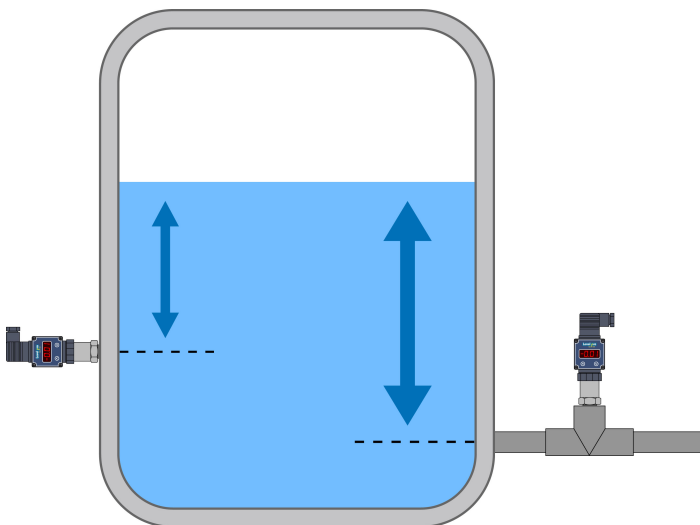

PFA

