

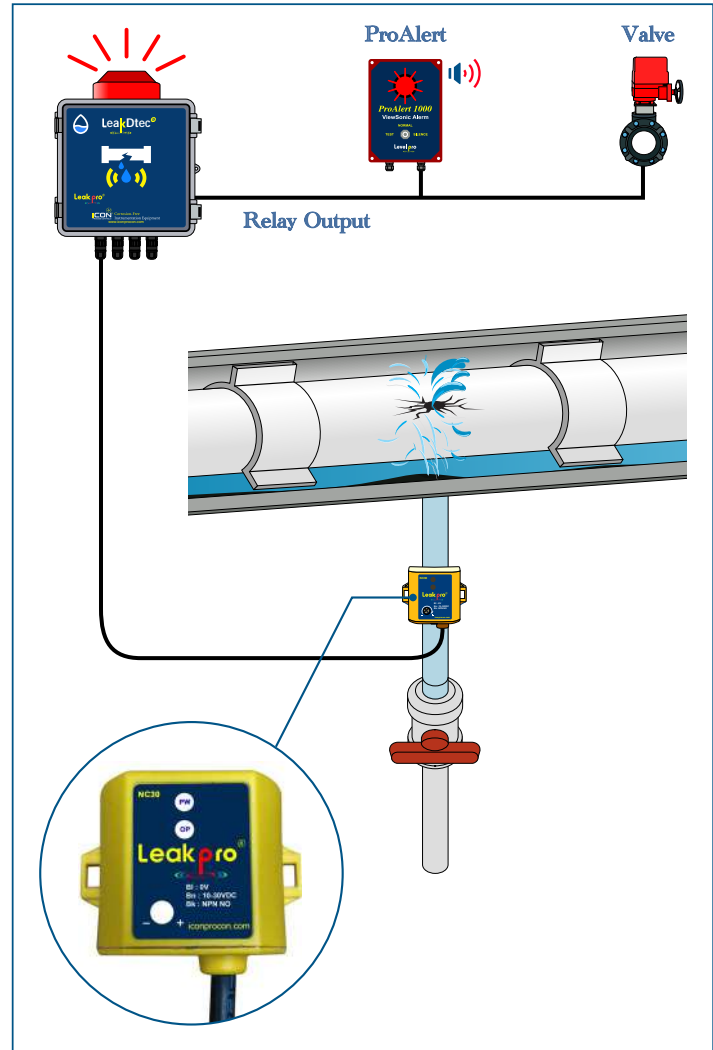


The LeakDtec® NC Series controller can monitor up to two leak detection sensor cables. The controller continually monitors the capacitance of the sensing cable and provides both visual and audible notification of the presence of liquid media. The LeakDtec Series is an excellent choice when real-time notification is required; dual containment piping system, base stations, libraries, warehouse, museums, smart buildings, industrial sites, and other important areas where upset leaks are ever present.

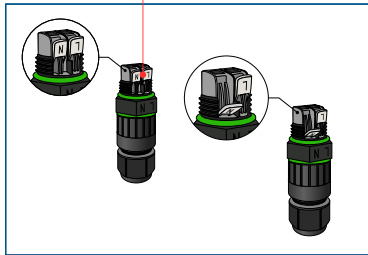


Features
❑ LED Indication Sensors
❑ Up to 24 Digital Inputs
❑ NEMA 4X Enclosure
❑ 10A Relay Outputs
❑ Low Voltage
❑ Visual + Audible Alarm Notification
❑ External Wiring Via Cable Grips

Technical Data	
Power Supply	120VAC 12-24 VDC
Detection Channels	4 8 12 16 24
Operating Temperature	-40 - 176°F
Visual + Audible Indication	Xenon LED 105dB
Button	Alarm Silence
Detection Channels	1 2 Input Cables
Output Relays	8 16 24 10A 250VAC
Sensor Cable Length	2500Ft 800m
Relays	10A 250VAC

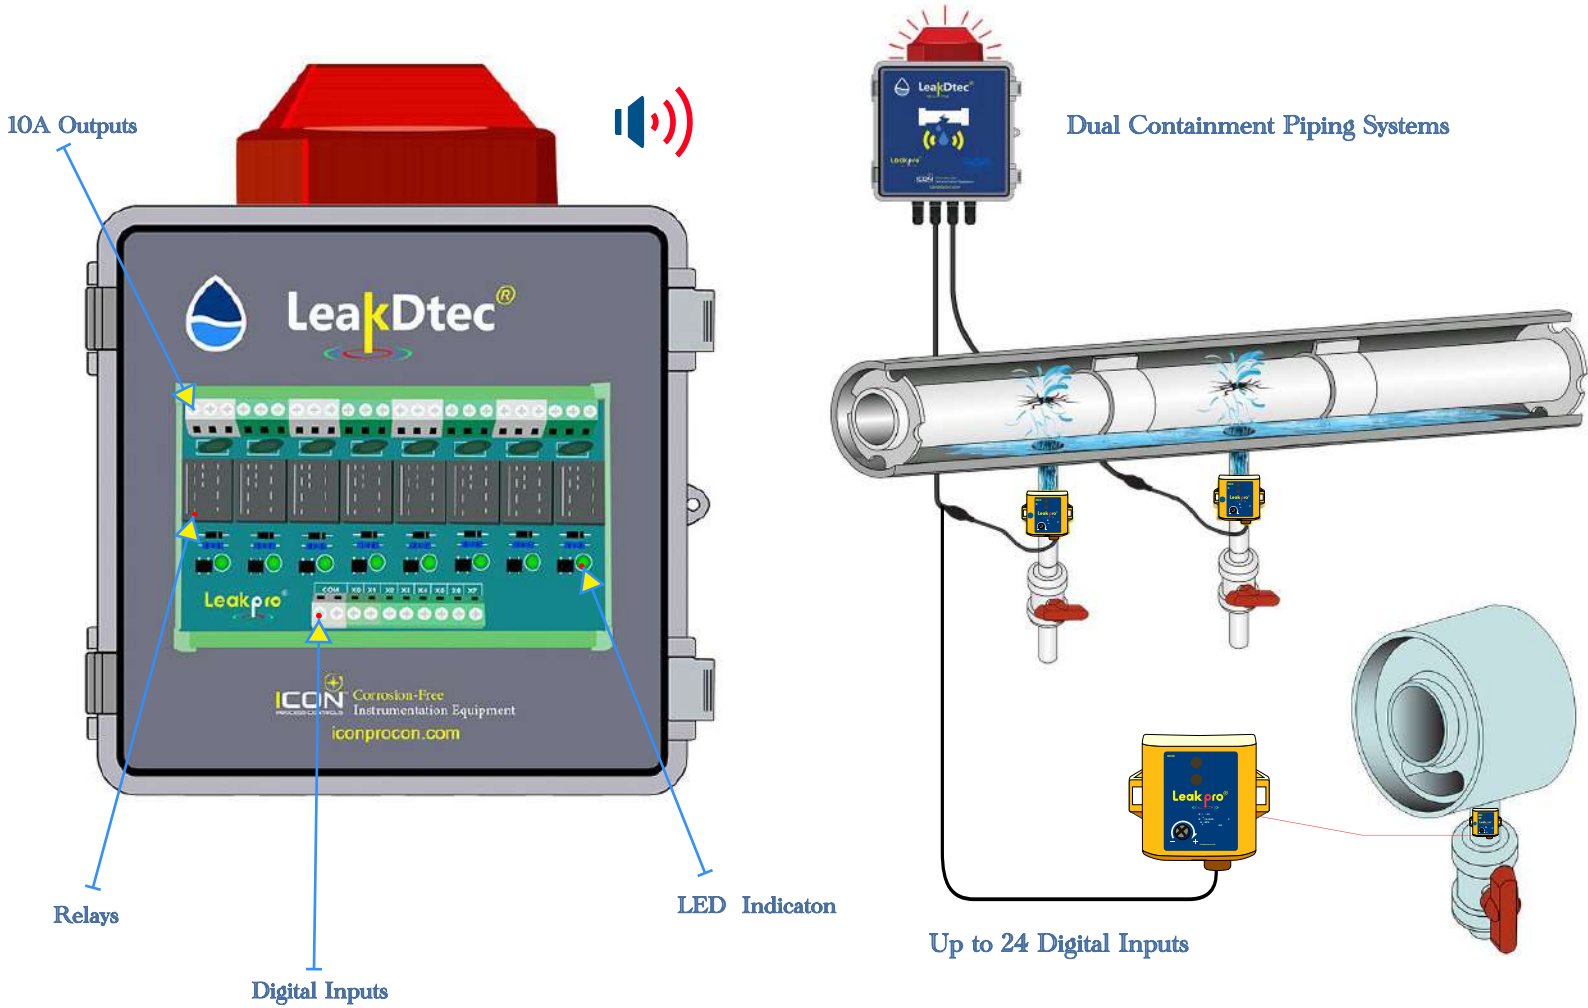


A Ubi U' bXJWUrcb

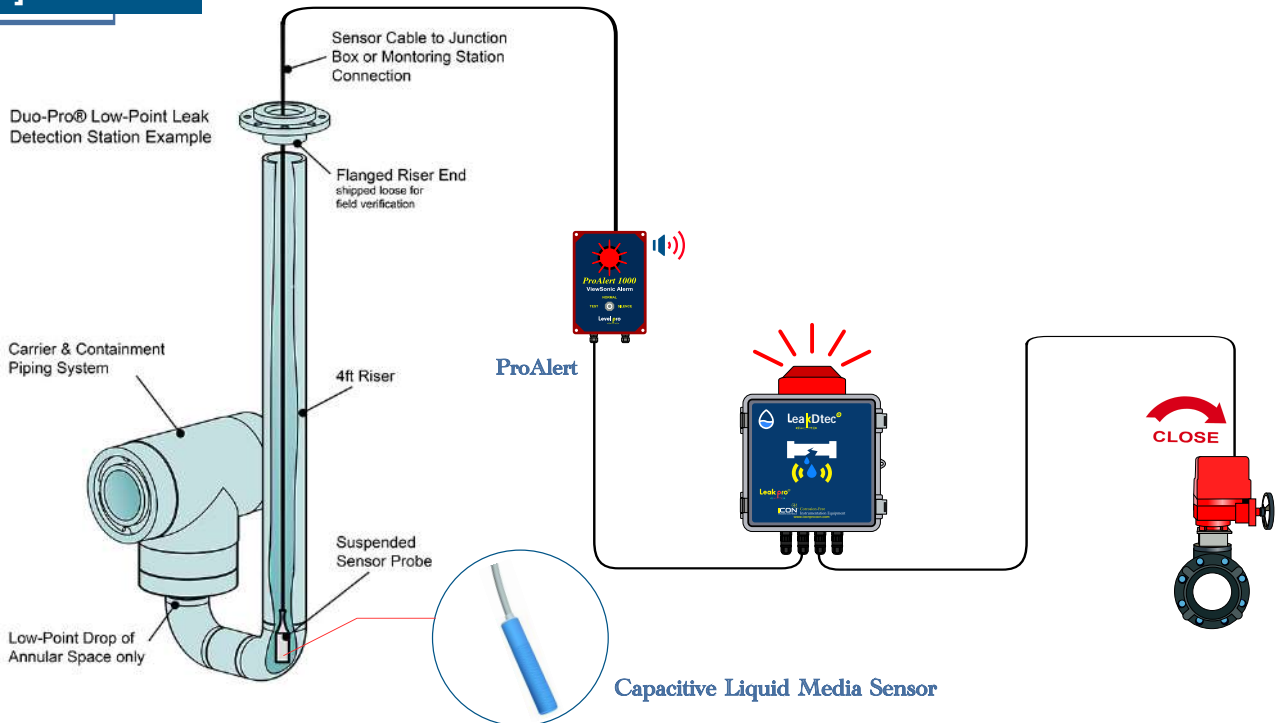

Manual Leak Detection

- ❑ Capacitive Liquid Sensor
- ❑ Solid State Output
- ❑ Rapid Leak Notification
- ❑ Normally Open
- ❑ Easy Installation
- ❑ No-Programming Required

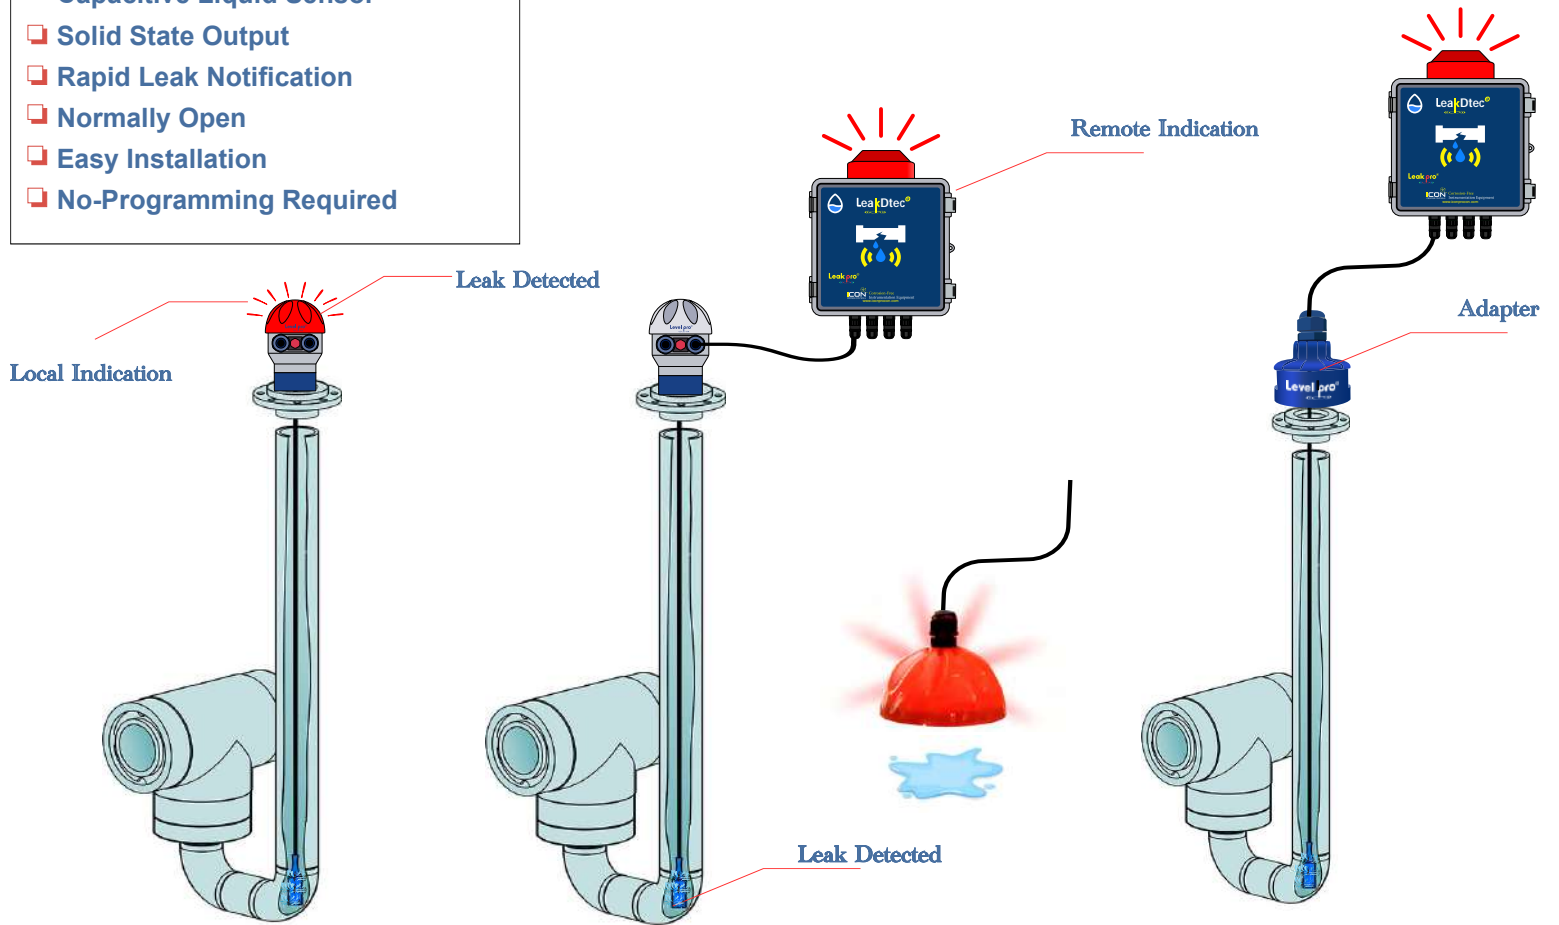

4-8 Channel



12-18-24 Channel



NC30 Sensor



LDS-NO

Monitor	Part Number	Monitor	Part Number
4-Channel	LDNC-4	16-Channel	LDNC-16
8-Channel	LDNC-8	18-Channel	LDNC-18
12-Channel	LDNC-12	24-Channel	LDNC-24