

- ❑ No Programming | Quick Installation
- ❑ Lifetime Warranty
- ❑ Industry's Highest Accuracy: $\pm 0.5\%$



316 SS

ETFE


FKM

Features

- ❑ Battery Operated
- ❑ Display Rotates 360°
- ❑ Bright LCD Digital Display
- ❑ No Programming Required
- ❑ Low Pressure Drop
- ❑ NEMA 4X | IP 66 Protection
- ❑ Password Protected Security

New ShearPro® Design

- ❑ Superhydrophobic Design
- ❑ Contoured Flow Profile
- ❑ Reduced Turbulence
- ❑ Reduced Friction
- ❑ 78% Less Drag than Old Flat Paddle Design*



*Ref: NASA "Shape Effects on Drag" **


Zirconium Ceramic Rotor | Bushings

- ❑ Industry's Highest Impact and Chemical Resistant Properties
- ❑ Up to 15x the Wear Resistance vs. Regular Ceramic
- ❑ Nano-Polished Mirror Finished = Less Friction - Longer Life
- ❑ Integral Rotor Bushings, Reduce Wear & Fatigue Stress



Through-Pin Design

- ❑ Eliminates Finger Spread
- ❑ No Lost Paddles
- ❑ Increased Temp. Rating
- ❑ 360° Housing Protects Rotor

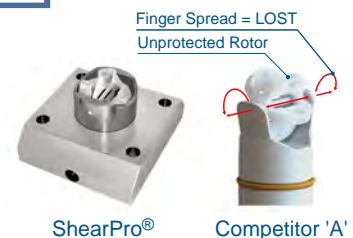

Re-Designed Tefzel® Rotor

- ❑ Patent Pending ShearPro® Contoured Paddle
- ❑ Reduced Turbulence = Reduced Wear = Longer Life
- ❑ Outstanding Flex Fatigue & Creep Resistance
- ❑ Surpassed only by Teflon® in Chemical Resistance
- ❑ Excellent Mechanical & Impact Properties
- ❑ Superior Wear Resistance vs PVDF

The TK3B Series Digital Flow Meters are easy to install with exceptional guaranteed long-life performance. TK3B Series Paddle Wheel Flow Sensors are highly repeatable, extremely rugged sensors that offer outstanding value and require no scheduled maintenance.

The TK3B Series has a process-ready output signal with a wide dynamic flow range of 0.3 to 33 ft/s | 0.1 to 10 m/s. The sensor measures liquid flow rates in full pipes.


The Truflo® TK3B Series sensors are available from 1/4" - 4" pipe sizes. All models come completely pre-programmed with a bright LED Display that rotates 360°.

The Truflo® TK3B Series also comes equipped with a lifetime warranty on the paddle wheel assembly.

Technical Specifications

General		
Operating Range	0.3 to 33 ft/s	0.1 to 10 m/s
Pipe Size Range	½ to 4"	DN15 to DN100
Linearity	±0.5% of F.S @ 25°C 77°F	
Repeatability	±0.5% of F.S @ 25°C 77°F	
Wetted Materials		
Sensor Body	316 SS	
O-Rings	FKM (std) EPDM FFKM	
Rotor Pin Bushings	Zirconium Ceramic ZrO ₂	
Paddle Rotor	ETFE Tefzel®	
Electrical		
Supply Voltage Battery	3-3.6 VDC ±10% regulated	
Operating Temperature		
316 SS	-40°F to 212°F	-40°C to 100°C
Outputs		
TK3B Series	Flow Frequency Pulse - Total	
Standards and Approvals		
CE FCC RoHS Compliant		

Exploded View



1. Flow Controller
2. Lead Wire
3. Hall Sensor
4. Paddle Wheel
5. Body 316 SS

* Note : CPVC Union Ends Available

Model Selection

TK3B - [] - [] - [] - []

Output	Pipe Size	End Connections	Seals
N/A	15 - ½" 50 - 2"	S - Sch 80 Soc	FKM Std
	20 - ¾" 80 - 3"	T - NPT	E - EPDM
	25 - 1" 100 - 4"	FT - FNPT	K - FFKM Kalrez®
	40 - 1 ½"	F - ANSI 150lb Flange	

Application Example

