



**SERIES : 100**  
**BODY : PVC / PP / PVDF / 316 SST**



## DESCRIPTION

Truflo ProMix Series Static Mixers have been Engineered that allow for the inline continuous blending of fluids within a pipeline. There are no moving parts, the kinetic energy of the process fluid generates cost effective reliable mixing.


## FEATURES

- Size Range ½" - 4"
- True Union Connection or Flanged
- Engineered 'Bow Knot' Design
- Heavy Duty Construction
- Large Inventory
- Simple to Install and Remove
- Transparent or Opaque
- Cost Effective

### Inline Static Mixer

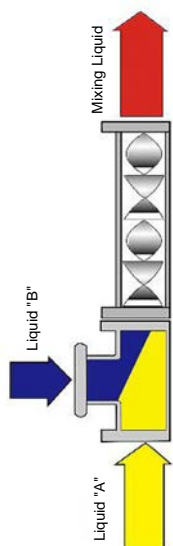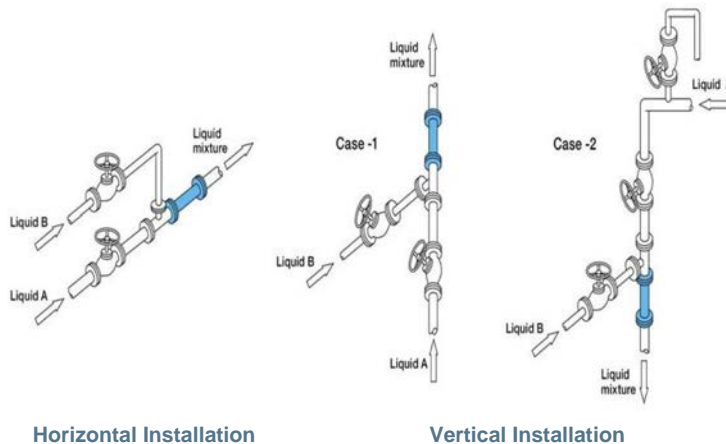

## Dimensions

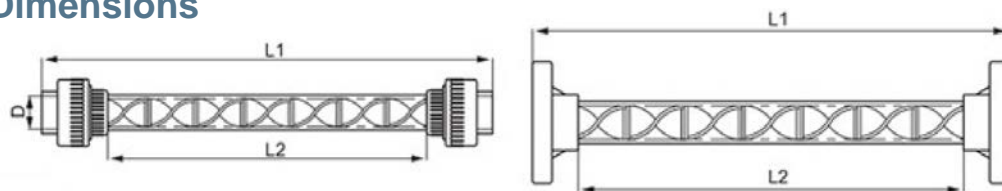

Part #	Size	D (mm)	L1 (mm)	L2 (mm)	(m <sup>3</sup> /h)
SK-68615	DN15 ½"	20	252	156	0.4~1
SK-68620	DN20 ¾"	25	330	225	0.6~1.8
SK-68625	DN25 1"	32	420	292	1~3.2
SK-68632	DN32 1 ¼"	40	495	336	1.4~6
SK-68640	DN40 1 ½"	50	565	406	2.2~10
SK-68650	DN50 2"	63	695	497	3.5~20
SK-68665	DN65 2 ½"	75	900	642	10~60
SK-68680	DN80 3"	90	800	770	15~80
SK-686100	DN100 4"	110	990	850	30~120